

NewNight® LED Function Spotlight FS1


Object lighting – facade lighting

Information

LED High Power Spotlight

With mounting bracket¹ (suitable for pin fastening²)

Highest efficiency of all system components - LongLIFE

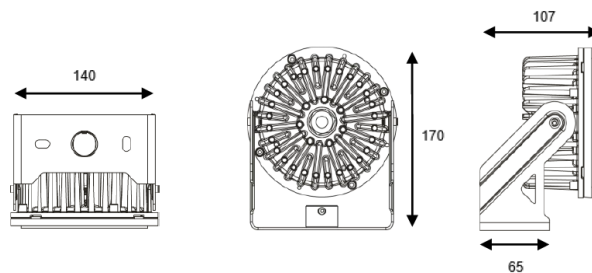


Technical Informations

Befestigung:	Mounting bracket made of stainless steel: hole spacing 65-110mm (2x M8)
Breite:	107 mm
CRI :	typ. 85
Farbe:	black
Farbtemperaturen:	3000K, 4000K, 5000K
Gewicht:	ca. 1,5 kg
Höhe:	170 mm
Input:	Constant current max. 1050mA
Länge:	140 mm
Lebensdauer:	L80B50 > 50.000h
Leistungsaufnahme :	42 Watt
Lichtstrom:	4400lm (3000K) 4600lm (4000K, 5000K)
Oberfläche:	anodised
Optische Abdeckung :	Polycarbonat (UV-resistent)

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



NewNight® LED Function Spotlight FS1

Object lighting – facade lighting

Schaltfunktionen:	on/off
Schutzart Leuchte :	IP67 SKI
Spannung :	36 V DC
Verwendung:	Object lighting – facade lighting
Zulässige Betriebsspannung:	90-305VAC
Zulässige Umgebungstemperatur:	- 40°C up to 50°C

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

