


PrimeLine

Halls • Large areas • Industrial and building lighting

Information

- LED-high power spotlight
- Ready for connection and easy to install and maintain
- Easy integration into existing lighting towers
- Low weight and low wind load
- Large light emission area and extremely powerful light output
- Highest efficiency of all system components - LongLIFE
- Different light distributions possible
- Insensitive to vibration
- ThermoProtect System against overtemperature of the LED

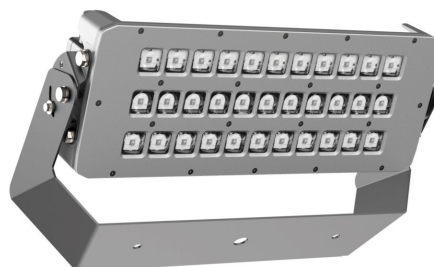



Technical Informations

Befestigung:	Mounting bracket made of stainless steel: adjustment range 140°
Betriebsgeräte:	CE ENEC DALI 0-10 1-10V (Dim-to-Off)
Breite:	200 mm
Farbtemperaturen:	3000K, 4000K, 5000K, 6500K
Gehäuse:	Die-cast aluminium, powder-coated
Gewicht:	13 kg
Höhe:	175 mm
Länge:	570 mm
Lebensdauer:	L80 60.000 - 100.000 h
Leistungsaufnahme :	1-280W
Lichtstrom:	27.653lm
Lichtverteilung:	siehe Varianten
Optische Abdeckung :	technical lens system
Überspannungsschutz :	10kA (Optional 20kA)
Verwendung:	Halls • Large areas • Industrial and building lighting
Zulässige Umgebungstemperatur:	- 40°C up to 50°C

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.




BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101





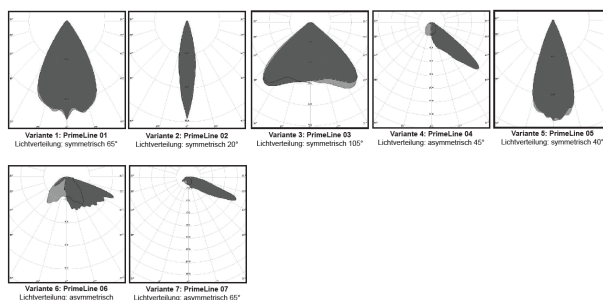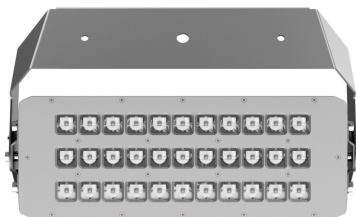

PrimeLine

Halls • Large areas • Industrial and building lighting



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



PrimeLine

Halls • Large areas • Industrial and building lighting

» Variante Basic E1:

- power consumption: 60 - 280 Watt
 - Luminous flux: 27.653lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: No
-

» Variante ECO:

- Luminous flux: 27.653lm
 - power consumption: 280 Watt
 - System performance: 101lm/W
 - Manually via 10-stage code switch: No
 - 0-10V | 1-10V Interface| Dim-to-Off: Yes
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: No
-

» Variante Light E2:



- Luminous flux: 27.653lm
 - power consumption: 60 - 280 Watt
 - System performance: 101lm/W
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: Yes
-

» Variante DALI:

- power consumption: 1-280W
 - Luminous flux: 27.653lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: No
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: No
 - Dali interface: Yes
 - Half-night switching via control voltage 230Vac: No
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

