

PrimeLine CL2

Halls • Large areas • Industrial and building lighting


Information

- LED-high power spotlight
- Ready for connection and easy to install and maintain
- Easy integration into existing lighting towers
- Low weight and low wind load
- Large light emission area and extremely powerful light output
- Highest efficiency of all system components - LongLIFE
- Different light distributions possible
- Insensitive to vibration
- ThermoProtect System against overtemperature of the LED






Technical Informations

| | |
|--------------------------------|--|
| Befestigung: | Mounting bracket made of stainless steel: adjustment range 140° Other types of mounting on request (e.g. chain suspension) |
| Betriebsgeräte: | CE ENEC DALI 0-10 1-10V (Dim-to-Off) |
| Breite: | 400 mm |
| Farbtemperaturen: | 3000K, 4000K, 5000K, 6500K |
| Gehäuse: | Die-cast aluminium, powder-coated |
| Gewicht: | 27 kg |
| Höhe: | 175 mm |
| Länge: | 570 mm |
| Optische Abdeckung : | technical lens system |
| Schaltfunktionen: | Eco (on/off) Basic E1 Light E2 DALI |
| Verwendung: | Halls • Large areas • Industrial and building lighting |
| Zulässige Betriebsspannung: | 100-240VAC, 50/60Hz |
| Zulässige Umgebungstemperatur: | - 40°C up to 50°C |



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.



BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101





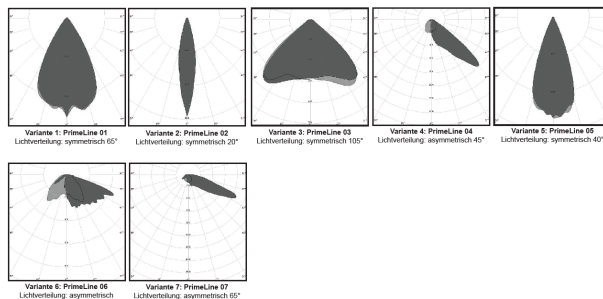

PrimeLine CL2

Halls • Large areas • Industrial and building lighting



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



PrimeLine CL2

Halls • Large areas • Industrial and building lighting

» Variante ECO:

- power consumption: 560 Watt
 - Luminous flux: 55.306lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: No
 - 0-10V | 1-10V Interface| Dim-to-Off: Yes
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: No
-

» Variante Basic E1:

- power consumption: 60 - 560 Watt
 - Luminous flux: 55.306lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: No
-

» Variante Light E2:



- power consumption: 60 - 560 Watt
 - Luminous flux: 55.306lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: Yes
 - Dali interface: No
 - Half-night switching via control voltage 230Vac: Yes
-

» Variante DALI:

- power consumption: 1 - 560 Watt
 - Luminous flux: 55.306lm
 - System performance: 101lm/W
 - Manually via 10-stage code switch: No
 - 0-10V | 1-10V Interface| Dim-to-Off: No
 - AstroDimm: No
 - Dali interface: Yes
 - Half-night switching via control voltage 230Vac: No
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

