

CurveLight PIN-MODUL

globe lamps and hanging lamps

Information



- Optimized for integration into streetlights
- Particularly suitable for use in all globe lamps and hanging lamps
- Connection-ready and easy-to-install module
- Easy installation and integration into luminaires
- UV-resistant high-performance lens made of optical silicone
- Highest possible efficiency of all system components
- Fulfills protection rating IP 68
- Dimmable

Optional

- temperature monitoring (ThermoProtect)



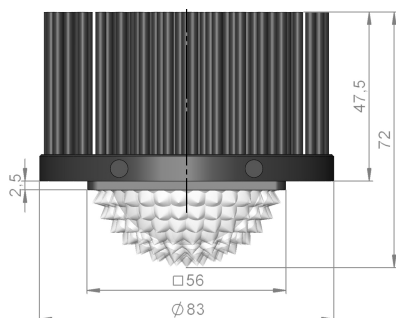

Technical Informations

CRI :	> 80
Gehäusemaße :	Ø83 mm x 72 mm
IP :	68
Lebensdauer:	L70 > 50.000h
Verwendung:	globe lamps and hanging lamps



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



CurveLight PIN-MODUL

globe lamps and hanging lamps

» Variante CurveLight 27 450mA:

- Bestellnummer: CurveLight 27
 - Leistungsaufnahme: 15,3 Watt
 - Lichtstrom: 2030lm
 - Spannung: 34 V
-

» Variante CurveLight 30 450mA:

- Bestellnummer: CurveLight 30
 - Leistungsaufnahme: 15,3 Watt
 - Lichtstrom: 2146lm
 - Spannung: 34 V
-

» Variante CurveLight 35 450mA:

- Bestellnummer: CurveLight 35
 - Leistungsaufnahme: 15,3 Watt
 - Lichtstrom: 2195lm
 - Spannung: 34 V
-

» Variante CurveLight 40 450mA:

- Bestellnummer: CurveLight 40
 - Leistungsaufnahme: 15,3 Watt
 - Lichtstrom: 2238lm
 - Spannung: 34 V
-

» Variante CurveLight 50 450mA:

- Bestellnummer: CurveLight 50
 - Leistungsaufnahme: 15,3 Watt
 - Lichtstrom: 2279lm
 - Spannung: 34 V
-

» Variante CurveLight 27 700mA:



- Bestellnummer: CurveLight 27
 - Leistungsaufnahme: 24,5 Watt
 - Lichtstrom: 2967lm
 - Spannung: 35 V
-

» Variante CurveLight 30 700mA:

- Bestellnummer: CurveLight 30
 - Leistungsaufnahme: 24,5 Watt
 - Lichtstrom: 3137lm
 - Spannung: 35 V
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



CurveLight PIN-MODUL

globe lamps and hanging lamps

» Variante CurveLight 35 700mA:

- Bestellnummer: CurveLight 35
 - Leistungsaufnahme: 24,5 Watt
 - Lichtstrom: 3209lm
 - Spannung: 35 V
-

» Variante CurveLight 40 700mA:





- Bestellnummer: CurveLight 40
 - Leistungsaufnahme: 24,5 Watt
 - Lichtstrom: 3272lm
 - Spannung: 35 V
-

» Variante CurveLight 40 700mA:

- Bestellnummer: CurveLight 40
 - Leistungsaufnahme: 24,5 Watt
 - Lichtstrom: 3331lm
 - Spannung: 35 V
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

