

3 LENS TAB-MODUL


Optimized for integration into street lights

Information

- Connection-ready and easy-to-install module
- Simple integration into lantern
- UV-resistant High-efficiency lenses made of PMMA
- Highest possible efficiency of all system components
- Fulfills protection rating IP 68
- Dimmable





Optional

- temperature monitoring (ThermoProtect)

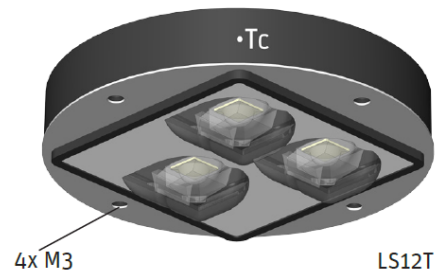

Technical Informations

Gehäusemaße :	Ø80 mm x 15 mm
IP :	68
Lebensdauer:	L70 > 50.000h
Verwendung:	Optimized for integration into street lights

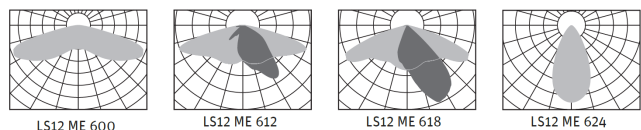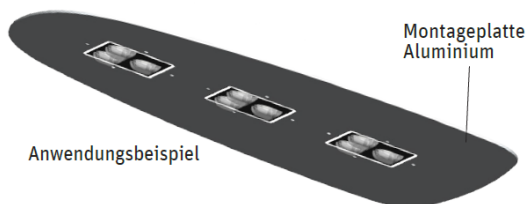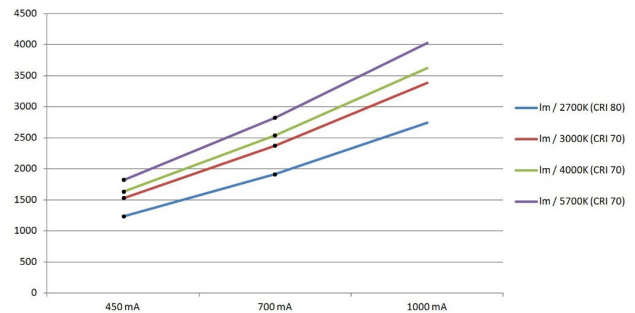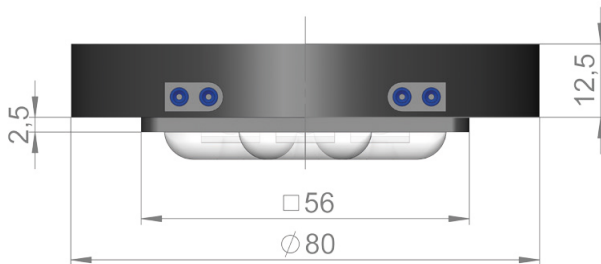

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

www.braun.lighting
info@braun-lighting.com
+49 (0)30 7 007 763-100
+49 (0)30 7 007 763-101



3 LENS TAB-MODUL

Optimized for integration into street lights

» Variante LS12 ME *xxx 27 450mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 27
 - Leistungsaufnahme: 14,9 Watt
 - Lichtstrom: 1233lm
 - Spannung: 32,7 V
 - CRI: > 80
-

» Variante LS12 ME *xxx 30 450mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 30
 - Leistungsaufnahme: 14,9 Watt
 - Lichtstrom: 1523lm
 - Spannung: 32,7 V
 - CRI: > 70
-

» Variante LS12 ME *xxx 40 450mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 40
 - Leistungsaufnahme: 14,9 Watt
 - Lichtstrom: 1632lm
 - Spannung: 32,7 V
 - CRI: > 70
-

» Variante LS12 ME *xxx 57 450mA:




- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 57
 - Leistungsaufnahme: 14,9 Watt
 - Lichtstrom: 1813lm
 - Spannung: 32,7 V
 - CRI: > 70
-

» Variante LS12 ME *xxx 27 700mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 27
 - Leistungsaufnahme: 23,5 Watt
 - Lichtstrom: 1918lm
 - Spannung: 33,6 V
 - CRI: > 70
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



3 LENS TAB-MODUL

Optimized for integration into street lights

» Variante LS12 ME *xxx 30 700mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 30
 - Leistungsaufnahme: 23,5 Watt
 - Lichtstrom: 2369lm
 - Spannung: 33,6 V
 - CRI: > 70
-

» Variante LS12 ME *xxx 40 700mA:


- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 40
 - Leistungsaufnahme: 23,5 Watt
 - Lichtstrom: 2538lm
 - Spannung: 33,6 V
 - CRI: > 80
-

» Variante LS12 ME *xxx 57 700mA:

- Lebensdauer: L70 > 50.000h
 - Bestellnummer: LS12 ME *xxx 57
 - Leistungsaufnahme: 23,5 Watt
 - Lichtstrom: 2820lm
 - Spannung: 33,6 V
 - CRI: > 80
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

