


BigTAB -LED-Modul

Halls • Large areas • Industrial and building lighting


Information

- Optimized for large lighting areas
- UV-resistant High-efficiency lenses made of PMMA
- Long service life of all system components
- Temperature monitoring of the LEDs (ThermoProtect)
- Insensitive to vibrations
- Operation Ready „plug and play“ module
- High lumen / watt efficiency • Daylight - dependent control
- Optional: adjustability of the LED power
- Optional: presence control

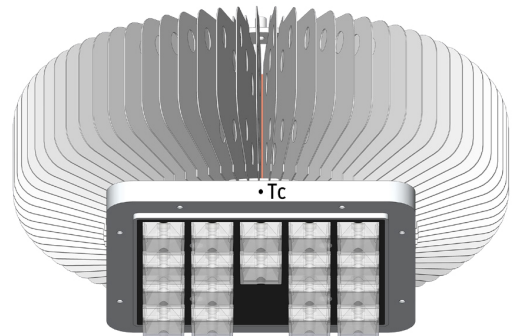


Technical Informations


Verwendung:	Halls • Large areas • Industrial and building lighting
Zulässige Umgebungstemperatur:	- 30°C up to 45°C




LS12 ME 640*



LS12 ME 616*





LS12 ME 600*



LS12 ME 601*



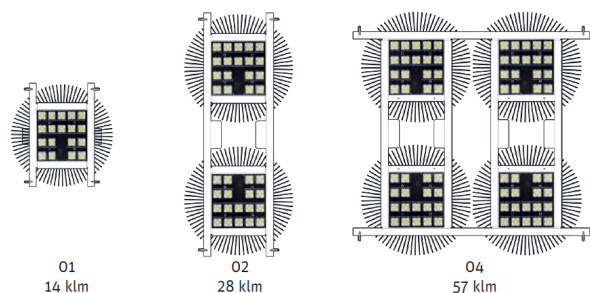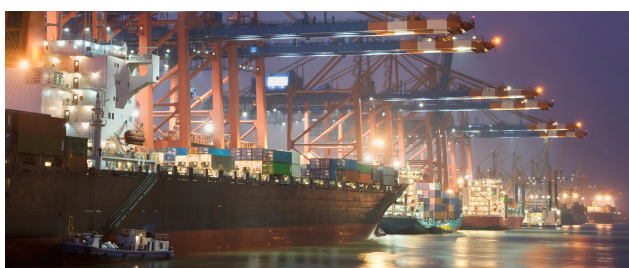

LS12 ME 624*



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



BigTAB -LED-Modul

Halls • Large areas • Industrial and building lighting

» Variante 01:

- Power: 150 Watt (4000K)
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: Yes
 - Half-night switching via control voltage 230Vac: Yes
 - ThermoProtect System: No
 - Adjustable power in Watts approx.: ca. 25 - 150W
-

» Variante 02:



- Power: 300 Watt (4000K)
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: Yes
 - Half-night switching via control voltage 230Vac: Yes
 - ThermoProtect System: Yes
 - Adjustable power in Watts approx.: ca. 45 - 300W
-

» Variante 04:

- Power: 600 Watt (4000K)
 - Manually via 10-stage code switch: Yes
 - 0-10V | 1-10V Interface| Dim-to-Off: Yes
 - Half-night switching via control voltage 230Vac: Yes
 - ThermoProtect System: No
 - Adjustable power in Watts approx.: ca. 45 - 300W
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

