

# NewNight® DKstreet LED

Streets - buildings - settlement and district lighting

## Information

- Mini LED pole mount luminaire / pole top luminaire
- Ready for connection and easy to install
- Aluminium housing, powder-coated RAL7035
- Different light distributions possible
- Different mast mountings (adapters) possible
- Highest efficiency of all system components
- LED ROOM: IP67
- LED control gear: IP67
- Permissible operating voltage: 100-240VAC, 50/60Hz
- Overvoltage protection up to 4kv
- Optical cover: impact resistant, UV and weather resistant
- Insensitive to vibrations
- Lifetime L80B50 > 50.000h





## Technical Informations

Betriebsgeräte:	IP67
CRI :	> 70
Farbtemperaturen:	4000K, 5000K
Lebensdauer:	L80B50 > 50.000h
LED-Raum :	Protection level IP67
Leistungsaufnahme :	28 Watt
Schaltfunktionen:	ON/OFF
Schutzklasse :	IP67   SKI
Technische Informationen :	<ul style="list-style-type: none"><li>• Mini LED Mastansatzleuchte / Mastaufsatzleuchte</li><li>• Anschlussfertig und montagefreundlich</li><li>• Gehäuse aus Aluminium, pulverbeschichtet RAL7035</li><li>• Verschiedene Lichtverteilungen möglich</li><li>• Verschiedene Mastaufnahmen (Adapter) möglich</li><li>• Höchste Effizienz aller Systemkomponenten</li><li>• Vibrationsunempfindlich</li></ul>
Überspannungsschutz :	bis zu 4kv
Verwendung:	Streets - buildings - settlement and district lighting
Zubehör:	Adapter 1*   Adapter 2*: Ø34mm, Ø42mm, Ø48mm   Ø60mm, Ø76mm Main dimensions + Weight (adapter 1* - mast attachment) : 511x119x97mm, ca. 2,6kg Main dimensions + Weight (adapter 1* - mast top) 384x119x212mm, ca. 2,6kg
Zulässige Betriebsspannung:	100-240VAC, 50/60Hz
Zulässige Umgebungstemperatur:	- 40°C up to 50°C

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

# NewNight® DKstreet LED

Streets - buildings - settlement and district lighting

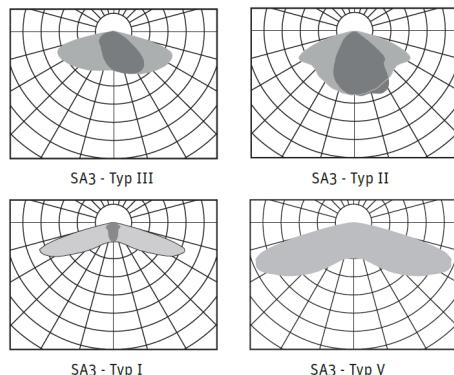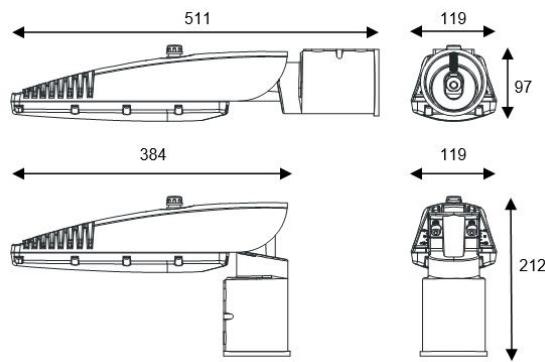

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions  
Nunsdorfer Ring 2-10  
12277 Berlin  
Germany

[www.braun.lighting](http://www.braun.lighting)  
 [info@braun-lighting.com](mailto:info@braun-lighting.com)  
 +49 (0)30 7 007 763-100  
 +49 (0)30 7 007 763-101

 **BRAUN**<sup>®</sup>  
LIGHTING SOLUTIONS