

NewNight Bollard Luminaire BLADE1000

LED light bollard

Information

This high-quality bollard from the NewNight® series BLADE is suitable as an orienting and conductive lighting in residential and administrative complexes, in parks and gardens, on paths, external staircases as well as access roads, and garage entrances.
Light control: BLADE-LENSING SYSTEM LED LIGHT 8in1
Light output: 360° rotationally symmetrical light distribution (alternatively 180° asymmetrical)
Supplied for the different dimensions of the installation locations and different heights above floor:
800mm | 1000mm
The bollard can be supplied with a ground anchor plate or with an integrated foundation pipe.







Technical Informations

Anschlussleistung:	12 Watt 14 Watt
Betriebsgeräte:	IP66
CRI :	> 85
Farbe:	RAL or DB color or special colors of your choice
Farbtemperaturen:	4100K (frei wählbar)
Gehäuse:	Aluminium
Lebensdauer:	> 60.000 h
LED-Raum :	Protection level IP67
Lichtstrom:	1040lm (12W) 1488lm (14W)
LPH über Flur :	1000mm-800mm
Oberfläche:	anodised or painted
Optische Abdeckung :	Impact-resistant, UV and weather-resistant clear plastic
Pollerkopf :	Aluminium
Schraubverbindungen:	Stainless steel
Schutzklasse :	SK I
Verwendung:	LED light bollard
Zulässige Betriebsspannung:	230 VAC, 50/60Hz
Zulässige Betriebsspannung:	230 VAC, 50/60Hz
Zulässige Umgebungstemperatur:	- 40°C up to 55°C
Zulässige Umgebungstemperatur:	- 40°C up to 55°C

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.


BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101





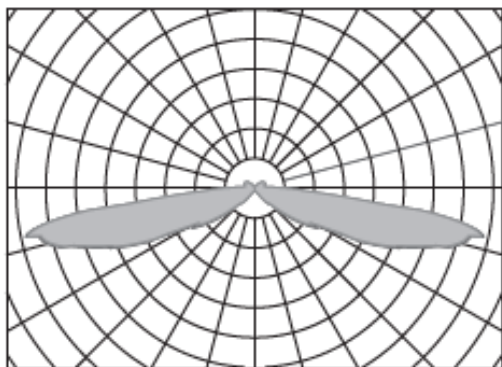

NewNight Bollard Luminaire BLADE1000

LED light bollard



BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

