

Rodan

Gas top light/model light

Information

The Rodan gas top light is a faithful reconstruction of the BAMAG U7. This gas lamp achieves an excellent illumination, with a highly brilliant and natural color rendering. This golden-yellow illumination makes the surroundings appear lively and natural. High quality materials guarantee its longevity. The luminaire is very easy to maintain due to a hinged roof and a fold-down glass dome. Due to its rotationally symmetrical light distribution, this luminaire is ideally suited for the illumination of squares, streets, residential areas, green spaces, and driveways.







Technical Informations

Breite:	ca. 425 mm
Gasverbrauch:	at constant operating pressure of 24 mbar: 0.1 m ³ /h (4 bottles)
Gewicht:	ca. 9 kg
Glockenring:	Sheet metal, enamelled, white
Höhe:	ca. 830 mm
Leuchtenfuss-Ausführungen:	V1: Standardvariante mit Messingformstücken zur Befestigung der Leuchte auf Mastkapitell, Leuchtenflansch (Ø150mm) mit 2x Langloch (für M12) für Kapitellbohrbild Ø79-105 mm V2: Variante mit verschraubter Abdeckung zur Befestigung der Leuchte auf Mastkapitell Leuchtenflansch (Ø150mm) mit 2x Langloch (für M12) für Kapitellbohrbild Ø79-105 mm V3: Variante mit verschraubter Abdeckung zur Befestigung der Leuchte auf Mast mit Zopfaufnahme V3a: Zopfmass Ø60mm V3b: Zopfmass Ø76mm (Weitere Befestigungsarten auf Anfrage und gegen Mehrpreis möglich)
Leuchtenhaube :	foldable version made of weather-resistant natural Aluminum.
Reflektor:	Sheet metal, enamelled, white
Scharniere und Verschlusssteile :	Stainless steel or galvanized sheet steel
Sonstige Leuchtenbauteile :	galvanized or hot-dip galvanized steel
Technische Informationen :	The gas is ignited by electronic ignition. An intelligent switching electronics controls a micro solenoid valve and guarantees functional safety. The BS-N 5.0 model is powered by a battery, the BS-GC Solar version is powered by solar technology.
Verteilungskammer Flammen :	4

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany


 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101




Rodan

Gas top light/model light


Verwendung:	Gas top light/model light
Vorbereiteter Gasglühkörper :	Socket 1562

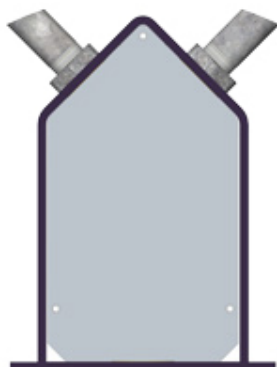



V2

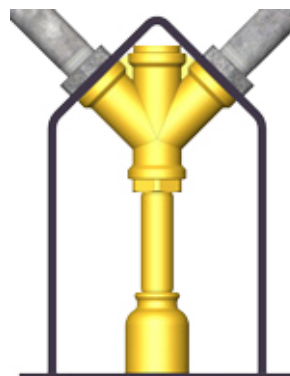

V1

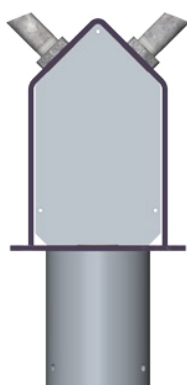

V3 a/b

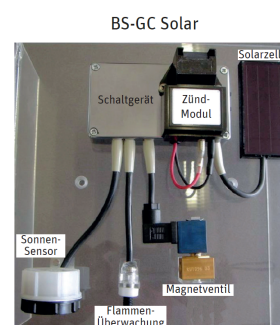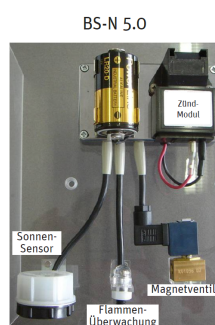

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
 Nunsdorfer Ring 2-10
 12277 Berlin
 Germany

www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

