


His.lux® LED Top Light

LED skylight for lighting systems for homogeneous illumination of lighting fixtures


Information

LED top light for homogeneous illumination the interior of the luminaire
Ideally suited for retrofitting existing systems
Easy installation due to M8 thread
Light distribution hemispherical
Light color freely selectable

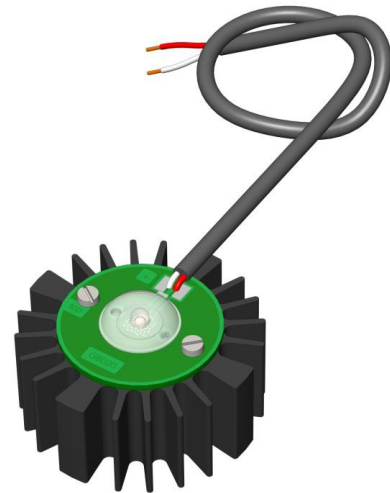

Technical Informations


Anschlüsse :	Connection cable 2-core, L=330mm
Farbtemperaturen:	2700K 3000K 4000K 5700K
Gehäusemaße :	Ø60x35mm
Gewicht:	ca. 0,3 kg
Kühlkörper:	Anodized aluminum
Lebensdauer:	L70 > 50.000h
Leistung :	350mA 700mA
Lichtverteilung:	180° halbkugelförmig
Optische Linse :	Ultra Wide Bubble Optic
Verwendung:	LED skylight for lighting systems for homogeneous illumination of lighting fixtures



Ø60mm

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.


BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101



His.lux® LED Top Light

LED skylight for lighting systems for homogeneous illumination of lighting fixtures

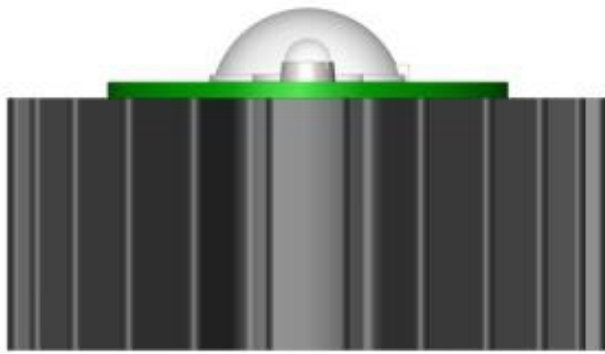

Height: 35mm

» Variante 350mA:





- Power: 1 Watt
 - Dimmable: Yes
 - Luminous flux: 85lm on 2700K
 - Luminous flux: 81lm at 3000K
 - Luminous flux: 130lm at 4000K
 - Luminous flux: 135lm at 5700K
-

» Variante 700mA:

- Power: 2 Watt
 - Luminous flux: 156lm at 2700K
 - Luminous flux: 145lm at 3000K
 - Luminous flux: 230lm at 4000K
 - Luminous flux: 235lm at 5700K
 - Dimmable: Yes
-

BRAUN Lighting Solutions e. K. is a participant in the export initiative "Energie Effizienz – made in Germany", initiated by the Federal Ministry for the Economy and Technology. Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN EN and VDE regulations; the product conforms to European EMC regulations.

BRAUN Lighting Solutions
Nunsdorfer Ring 2-10
12277 Berlin
Germany

 www.braun.lighting
 info@braun-lighting.com
 +49 (0)30 7 007 763-100
 +49 (0)30 7 007 763-101

